


# Rigging Procedures in Construction

Christmas Treeing



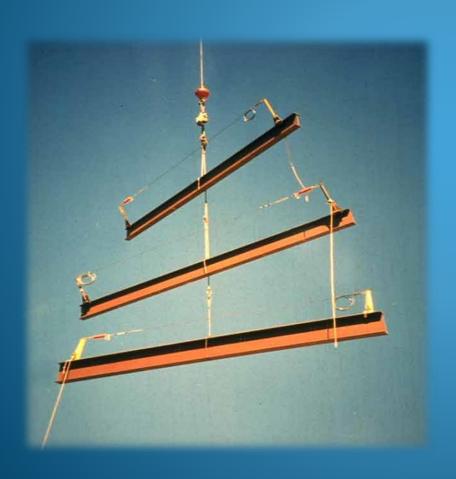

# Steel Connector





### Cargo Securement

• Indirect tie-down properly inside the Rub-rail





#### Direct Tie Down

Rule changes at 10,001 lbs to each chain needs a WLL of a minimum of 5,000





### Cargo Securement Needed



